Made in USA

cULus
LISTED
E363518

DIMMABLE

LUMIRON

Linear LED Lighting
SPECTRO RGBW T3 SERIES

20725 NE. 16 AVE. #A-33
MIAMI, FLORIDA 33179

TEL: (305) 652-2599

FAX: (305) 650-8812

WWW.LUMIRON.COM

EMAIL:SALES@LUMIRON.COM

Benefits and Feature

1. Dimmable, DMX, WiFi, RF Wireless
2. Low Power Consumption
3. Easy Installation and Low Maintenance
4. Custom Lengths and Unique Color Sequencing Available
5. Indoor and Outdoor

Application

The new SPECTRO RGBW 75 24LED T3 Linear LED is a great product to improve the lighting experience for your future Cove and Architectural work, Jewelry Showcases, Museum Lighting, and Marine Lighting. The product contains 12 LED's with two colors that create an exceptional view for the eye.

Specifications

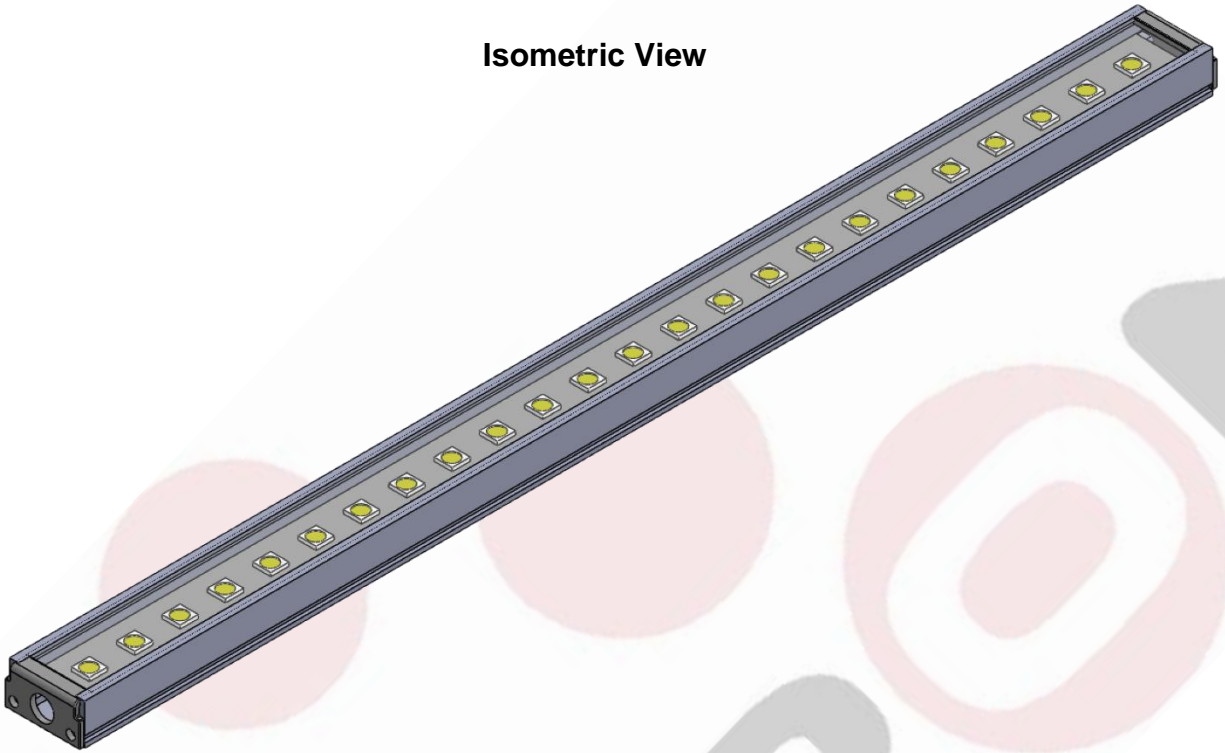|	
Lengths	3 Inch – 48 Inch *Custom Lengths Available
Color Temperature	RGBW Red / Green / Blue / Cool White, Neutral White, Warm White
Wattage	6 Watts
Lumens	
Input Voltage	24 VDC
View Angle	120 degrees
LED Spacing	0.5 Inch Center to Center
LED Type	T3
IP Rating	Indoor Standard – outdoor IP67 EPX Series
Lens	Clear Acrylic Standard or Milky Lens Standard
Housing	Anodized Clear Aluminum Extrusion * Custom Colors Available (e.g., Gold, Black)
Mounting	Wall Snap Mounting Standard/Swivel Mounting Brackets
Leads	2 Foot 18G 2 Cond *Custom Wire Lengths Available

Order Codes

SERIES	LENGTH	COLOR TEMP	#LED / F	VOLTAGE	IP LISTING	LENS	MOUNTING
SPECTRO 75	6" – 10'	**RGBW** Multicolor LED	24L T3 6W/FT	24VDC	**IN** Indoor **EPX** Outdoor	**CL** clear **MK** Milky	**WS** wall snap **SV** swivel **VR** velcro **MG** magnet Custom Mounting

Order Example

SERIES	LENGTH	COLOR TEMP	#LED / F	VOLTAGE	IP LISTING	LENS	MOUNTING
SPECTRO 75	4'6"	RGB CW	24L T3	24 VDC	**IN** Indoor	**CL** clear	**WS** swivel

Modeling

Isometric View

Top View

Example colors:

DIMMABLI	120°	Transf. Excl.	IP 20	IP 67 EPX	←	↑	24 VDC	12 LED PER/ft		

Side View Extrusion

Lens

LED Board

Extrusion

.45 in / 11.0 mm

.83 in / 21.0 mm

6.0 in - 10.0 ft

.83 in / 21.0 mm
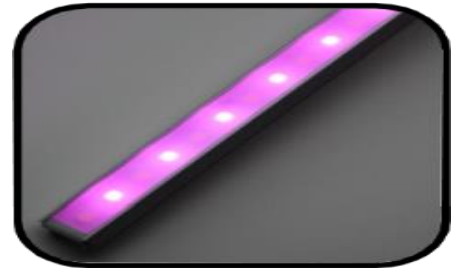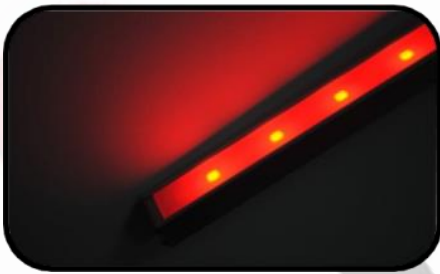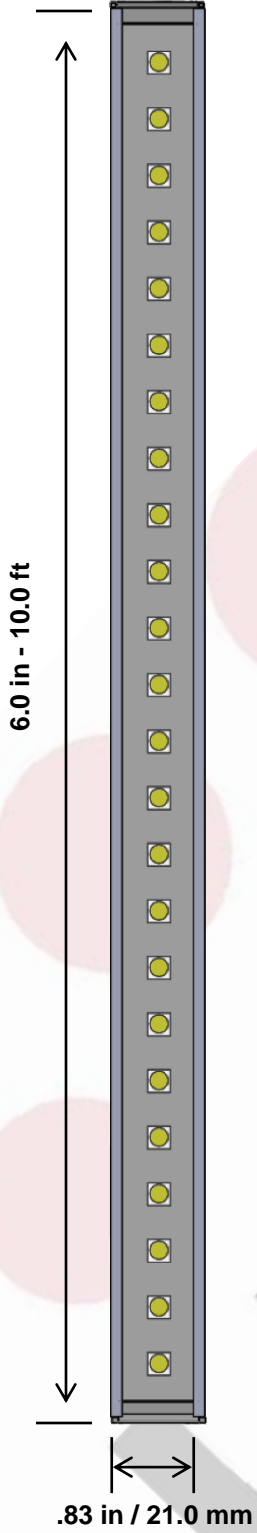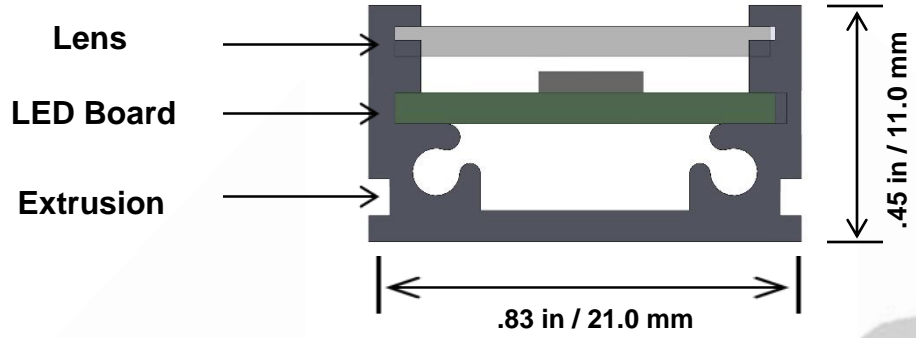
Application Brackets

Fixed Application Bracket

1.01 in / 29.7 mm

.42 in / 10.5 mm

.86 in / 21.9 mm
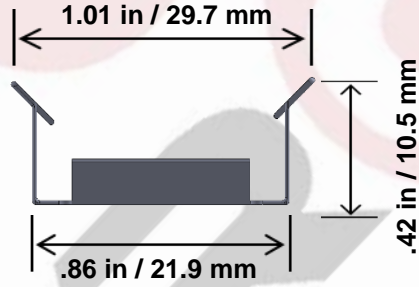
Swivel Application Bracket

.81 in / 20.6 mm

.98 in / 24.9 mm

1.50 in / 38.1 mm

Diffused Lens

Clear Lens

4