







" LINEAR LED Lighting
LEDO 75-12L-T3
12 LED "

20725 NE. 16 AVE. #A-33 MIAMI, FLORIDA 33179

Tel: (305) 652-2599
Fax: (305) 650-8812
www.lumiron.com

Email: sales@lumiron.com





Benefits and Feature

- 1. Dimmable, DMX, Wi-Fi, RF Wireless.
- 2. Low Power Consumption.
- 3. Easy Installation and Low Maintenance.
- 4. Custom Lengths and Unique Color Sequencing Available.
- 5. Indoor and Outdoor.

Application

The new LEDO 75 12LED T3 Linear LED is a great product to improve the lighting experience for your future Cove and Architectural work, Jewelry Showcases, Museum Lighting, and Marine Lighting. The product contains 12 LED's with two colors that create an exceptional view for the eye.

Specifications

Lengths 3 Inch – 48 Inch *Custom Lengths Available

Color Temperature Warm White / Neutral White / Cool White / Red / Amber / Green / Blue

Wattage 2.5 Watts

Lumens 291 lm

Input Voltage 12 or 24 VDC

LED Type

View Angle 120 degrees

LED Spacing 1.0 Inch Center to Center

IP Rating Indoor Standard – outdoor IP67 EPX Series

Lens Clear Acrylic Standard or Milky Lens Standard

Housing Anodized Clear Aluminum Extrusion * Custom Colors Available (e.g., Gold, Black)

Mounting Wall Snap Mounting Standard/Swivel Mounting Brackets

Leads 2 Foot 18G 2 Cond *Custom Wire Lengths Available

Order Codes

SERIES	LENGTH	COLOR TEMP	#LED/F	VOLTAGE	IP LISTING	LENS	MOUNTING
LEDO 75	6" – 10'	CW Cool White NW neutral white WW warm white SCL single color LED	12L T3 2.5W/FT	12 or 24VDC	IN Indoor EPX Outdoor	CL clear MK Milky	WS wall snap SV swivel VR velcro MG magnet Custom Mounting

Order Examples


SERIES	LENGTH	COLOR TEMP	#LED / F	VOLTAGE	IP LISTING	LENS	MOUNTING
LEDO 75	4'6"	WW	12L T3	24 VDC	IN Indoor	CL clear	WS swivel

Modeling

Isometric View



Top View

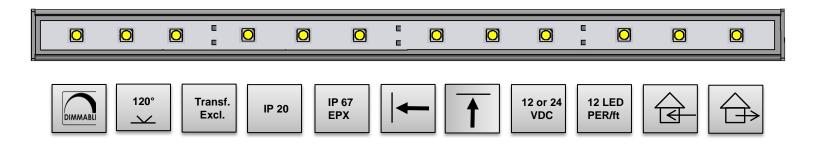

Side View Extrusion

