





Linear LED Lighting TRX 175C-36L-T3 36 LED

20725 NE. 16 AVE. #A-33 MIAMI, FLORIDA 33179

TEL: (305) 652-2599 FAX: (305) 650-8812 WWW.LUMIRON.COM EMAIL:SALES@LUMIRON.COM

Feature

- 1. Dimmable, DMX, WiFi, RF Wireless
- 2. Low Power Consumption
- 3. Easy Installation and Low Maintenance
- 4. Custom Lengths and Unique Color Sequencing Available

Application

The new TRX 175C2-36T3 Linear LED is a great product to improve the light for your future Cove and Architectural work, Jewelry Showcases, Museum Lighting, and Marine Lighting. The product contains 36 LED's that creates an exceptional view for the public.

Specifications

Lengths	6 Inch – 96 Inch *Custom Lengths Available
Color Temperature	Warm White / Neutral White / Cool White / Red / Amber / Green / Blue
Wattage	7.5 Watts
Lumens	873 lm
Input Vo <mark>ltage</mark>	12 or 24 VDC
View Angle	120 degrees
LED Spacing	0.5 Inch Center to Center
LED Type	ТЗ
IP Rating	Indoor Standard – Outdoor IP67 EPX Series
Lens	Clear Acrylic Standard
Housing	Anodized Clear Aluminum Extrusion * Custom Colors Available (e.g., Gold, Black)
Mounting	Wall Snap Mounting Standard
Leads	2 Foot 18G 2 Cond *Custom Wire lengths Available


Order Codes


SERIES	LENGTH	COLOR TEMP	#LED / F	VOLTAGE	IP LISTING	LENS	MOUNTING
TRX 100C-SW3	6" — 10'	CW Cool White NW neutral white WW warm white SCL single color LED RGB RGB&W	36L T3 6W/FT	12 or 24VDC	IN Indoor EPX Outdoor	CL clear MK Milky	SV Swivel

Order Example

SERIES	LENGTH	COLOR TEMP	#LED / F	VOLTAGE	IP LISTING	LENS	MOUNTING
TRX 100C-SW3	5'6"	CW	36L T3	12 VDC	IN Indoor	CL clear	SV swivel

3D Modeling

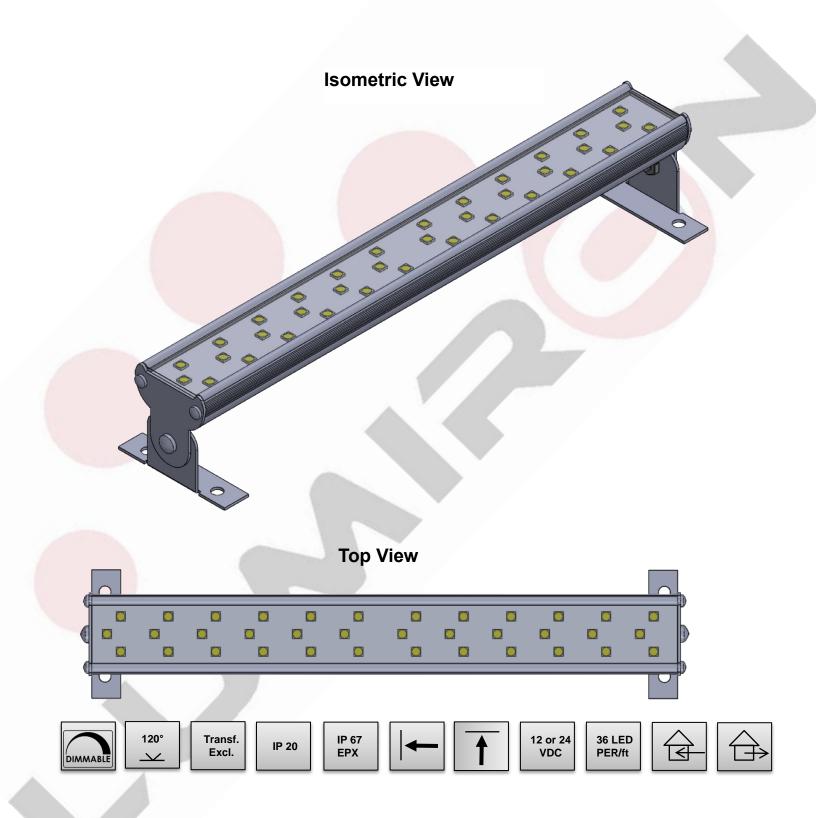

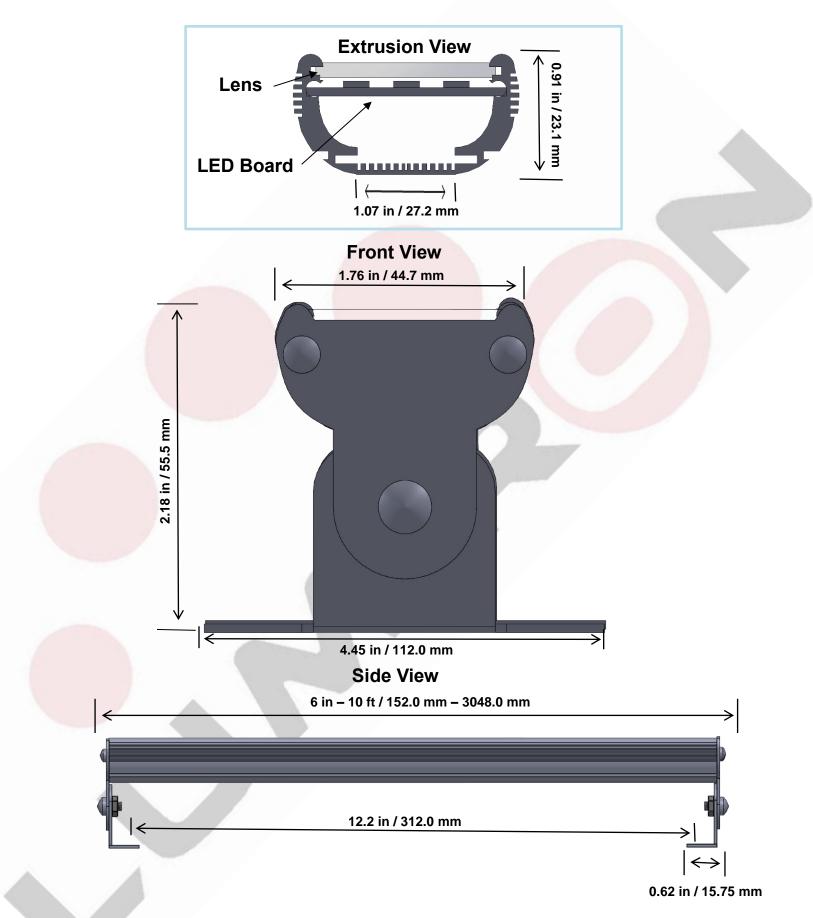

To view the 3D model of the Linear LED above please visit the website.